



Double "A"
for IP Surveillance



AETEK works with
Avigilon IP Cameras



www.aetektec.com



Content

01

**AETEK 95W PoE Switch/Injector works with
Avigilon PTZ/Multisensor PoE IP Cameras**

P1-5



02

**AETEK EPoC Products work with
Avigilon PoE IP Cameras**

P6-10



03

**AETEK ONVIF PoE switches work with
Avigilon PoE IP Cameras**

P11-15



04

**AETEK Camera Housings work with
Avigilon H4 HD / H4 PRO IP /
H5A Box Cameras**

P16-25



60W/95W PoE Injector / Switch

Work with

Avigilon PTZ / IR PTZ / Multisensor

Applications

Avigilon H4 IR PTZ :

1.0C-H4IRPTZ-DP45

2.0C-H4IRPTZ-DP30

1.0C-H4IRPTZ-DP45-WP

2.0C-H4IRPTZ-DP30-WP



IP67, IK10

-40°C~ 65°C

Built in PoE surge protection



Avigilon H4 PTZ:

2.0C-H4PTZ-DC30

Avigilon H5A PTZ:

2.0C-H5A-PTZ-DP36

2.0C-H5A-PTZ-DC36

4.0C-H5A-PTZ-DP36

4.0C-H5A-PTZ-DC36

8.0C-H5A-PTZ-DP36

8.0C-H5A-PTZ-DC36



IP67, IK10

-40°C~ 65°C

Built in PoE surge protection



Avigilon Multisensor :

15C-H4A-3MH-270

15C-H4A-3MH-180

24C-H4A-3MH-270

24C-H4A-3MH-180

12C-H4A-4MH-360

20C-H4A-4MH-360

32C-H4A-4MH-360



IP67, IK10

-40°C~ 65°C

Built in PoE surge protection



Double "A" for IP Surveillance



AETEK 95W PoH PoE Switch/Injector works with Avigilon PTZ/Multisensor PoE IP Cameras

Why needs AETEK's 95W PoH PoE Switch / Injector ?

- Feeds 95W PoH PoE to H4 PTZ / H4 IR PTZ / H5A PTZ and Multisensor Cameras
- Multiple 95W PoH PoE Output
- Works between -40°C and 75°C outdoor harsh environments
- 12KV surge protection on each PoE port
- GbE(RJ45) & GbE SFP optical fiber as uplink/downlink ports
- Sufficient Gigabit bandwidth



LAB TESTS



95W PoH PoE Switch / Injector Product Guide

Avigilon PoE IP Cameras

 Avigilon H4 Box camera • 1.0C-H4A-B3 • 3.0C-H4A-B2 • 2.0C-H4A-B1 • 3.0C-H4A-B3 • 2.0C-H4A-B2 • 5.0L-H4A-B2 • 2.0C-H4A-B3 • 5.0L-H4A-B3 • 3.0C-H4A-B1 • 8.0-H4A-B2	 Avigilon H5A Box Camera • 2.0C-H5A-B1 • 2.0C-H5A-B2 • 4.0C-H5A-B2 • 4.0C-H5A-B3 • 6.0C-H5A-B2 • 8.0C-H5A-B2	 Avigilon Outdoor Bullet Camera • 3.0-H4A-BO1-IR
 Avigilon H4 PRO Box camera • 8L-H4 PRO-B - 4K (8 MP)	 Avigilon H4 Fisheye • 6.0L-H4F-DO1-IR • 12.0-H4F-DO1-IR	 Avigilon Outdoor Bullet Camera • 2.0C-H5A-BO1-IR • 5.0C-H5A-BO2-IR • 2.0C-H5A-BO2-IR • 6.0C-H5A-BO1-IR • 4.0C-H5A-BO1-IR • 8.0C-H5A-BO1-IR 8.0 • 4.0C-H5A-BO2-IR
 Avigilon H4 PTZ • 2.0C-H4PTZ-DC30	 Avigilon H5A PTZ • 2.0C-H5A-PTZ-DP36 • 4.0C-H5A-PTZ-DC36 • 2.0C-H5A-PTZ-DC36 • 8.0C-H5A-PTZ-DP36 • 4.0C-H5A-PTZ-DP36 • 8.0C-H5A-PTZ-DC36	
 Avigilon H4 IR PTZ • 1.0C-H4IRPTZ-DP45 • 2.0C-H4IRPTZ-DP30 • 1.0C-H4IRPTZ-DP45-WP • 2.0C-H4IRPTZ-DP30-WP	 Avigilon Multisensor • 15C-H4A-3MH-270 • 12C-H4A-4MH-360 • 15C-H4A-3MH-180 • 20C-H4A-4MH-360 • 24C-H4A-3MH-270 • 32C-H4A-4MH-360 • 24C-H4A-3MH-180	

Indoor Gigabit 60W/95W PoH PoE Injector



I36-200

Features

- Provides 60W of PoE over 4-pairs UTP/STP
- 12KV PoE surge protection
- Supports 10/100/1000Mbps data rates



I39-200

Features

- Provides 95W of PoE over 4-pairs UTP/STP
- 12KV PoE surge protection
- Supports 10/100/1000Mbps data rates

Outdoor Gigabit 60W/95W PoH PoE Injector



I46-200

Features

- Outdoor IP67, IK10, -40°C ~ 65°C
- Provides 60W PoH PoE over 4-pairs UTP/STP
- 12KV PoE surge protection
- Supports 10/100/1000Mbps data rates



I49-200

Features

- Outdoor IP67, IK10, -40°C ~ 65°C
- Provides 95W PoH PoE over 4-pairs UTP/STP
- 12KV PoE surge protection
- Supports 10/100/1000Mbps data rates

Industrial Gigabit 90W/95W PoE Injector



I69-200

Features

- Provides 95W PoH PoE over 4-pairs UTP/STP
- 12KV PoE surge protection
- Supports 10/100/1000Mbps data rates
- -40°C ~ 75°C operating temperature



I69-206

Features

- 12~56VDC Power Input
- Provides 95W PoH PoE over 4-pairs UTP/STP
- 12KV PoE surge protection
- Supports 10/100/1000Mbps data rates
- -40°C ~ 75°C operating temperature

Industrial Gigabit 95W PoH PoE Media Converter



M30-022-90

Features

- 2-port Gigabit 95W PoH PoE + 2-port Gigabit SFP
- 48~56VDC Input Power
- 12KV surge protection
- -40°C ~ 75°C operating temperature

Industrial Gigabit 95W PoH PoE Switch



H30-044-90

Features

- 4-port Gigabit 95W PoH PoE + 2-port Gigabit SFP
- 12KV PoE surge protection
- -40°C ~ 75°C operating temperature



H36-044-90

Features

- 4-port Gigabit 95W PoH PoE + 2-port Gigabit RJ45 + 2-port Gigabit SFP
- 12V~56VDC Input Power
- 12KV PoE surge protection
- -40°C ~ 75°C operating temperature

Outdoor Gigabit 95W PoH PoE Switch



H40-022-90-120

Features

- Outdoor IP67, IK10, -40°C ~ 65°C
- 2-port Gigabit 95W PoH PoE + 2-port Gigabit SFP
- 12KV PoE surge protection




H40-044-90-250

Features


- Outdoor IP67, IK10, -40°C ~ 65°C
- 4-port Gigabit 95W PoH PoE + 2-port Gigabit RJ45 + 2-port Gigabit SFP
- 12KV PoE surge protection

Applications


Indoor Gigabit 60W/95W PoH PoE Injector

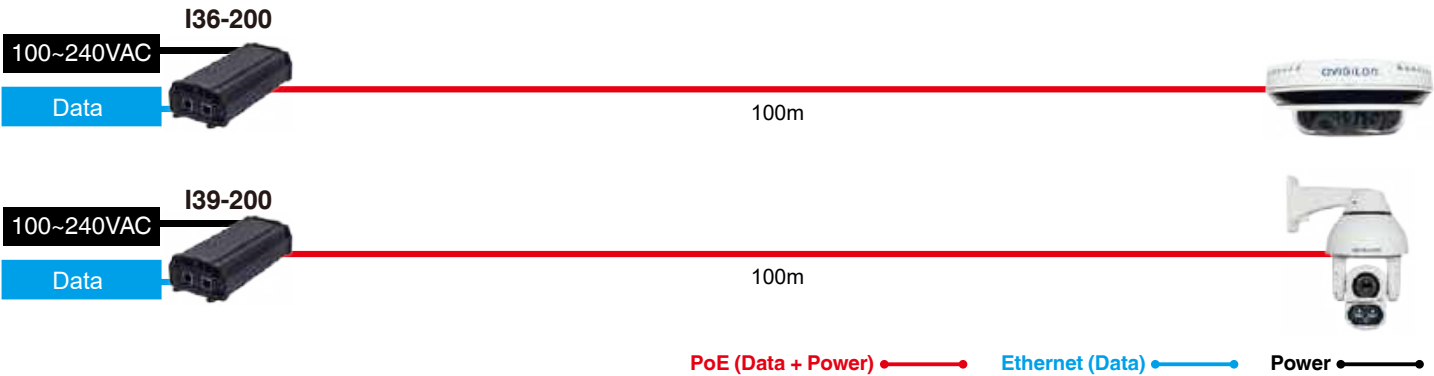


Outdoor Gigabit 60W/95W PoH PoE Injector

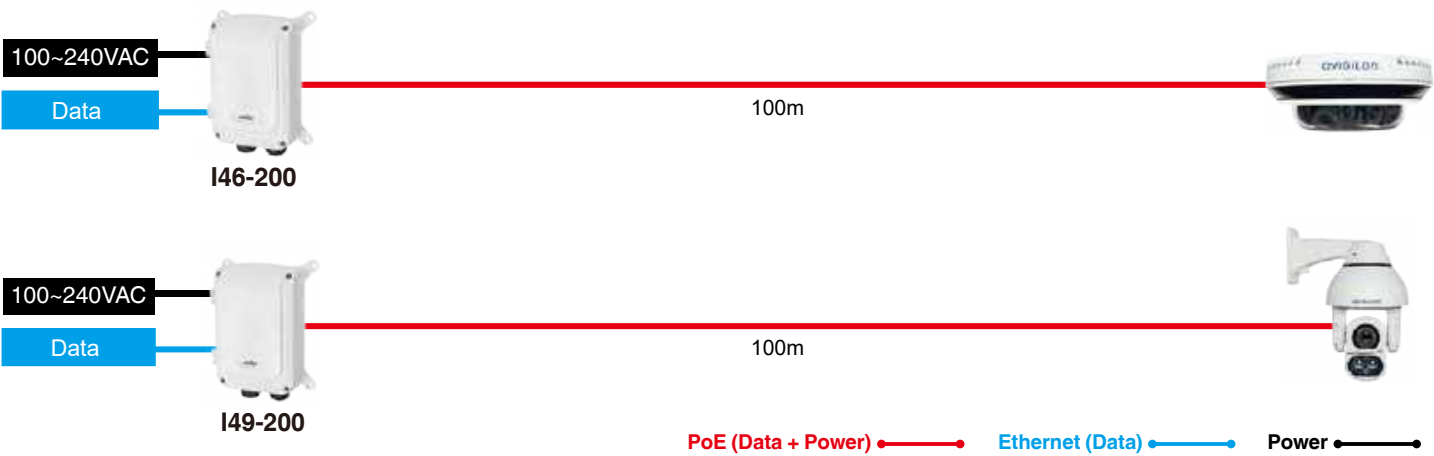

Industrial Gigabit 95W PoH PoE Injector w/ 12V~56VDC Input

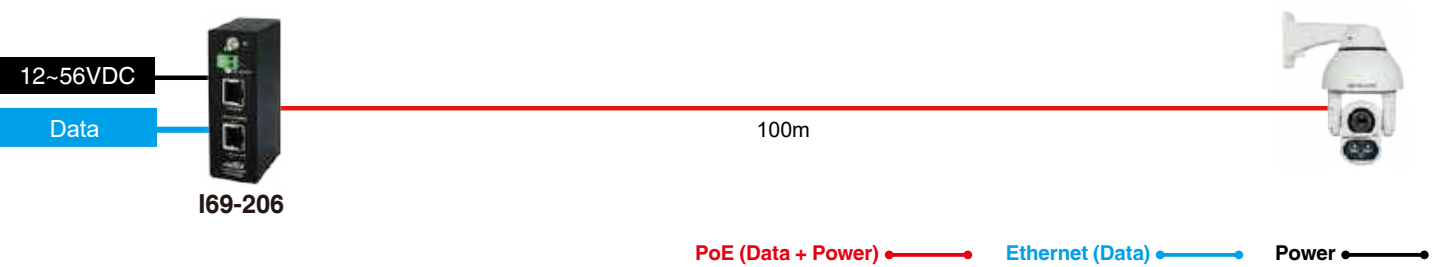


Industrial Gigabit 95W PoH PoE Switch

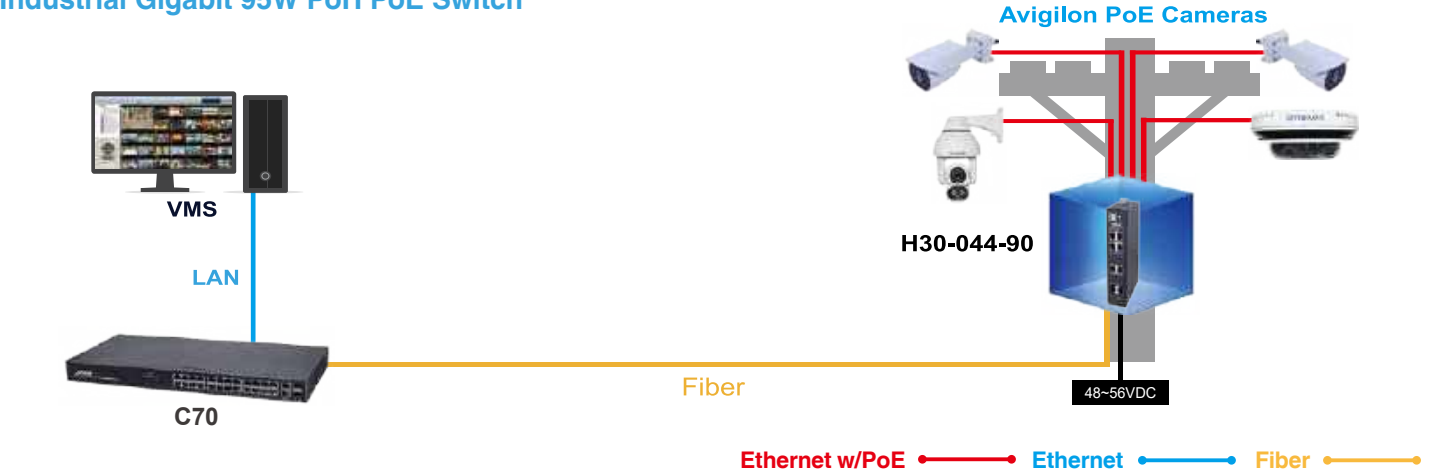


Applications

Industrial Gigabit 95W PoH PoE Switch w/ 12V~56VDC Input

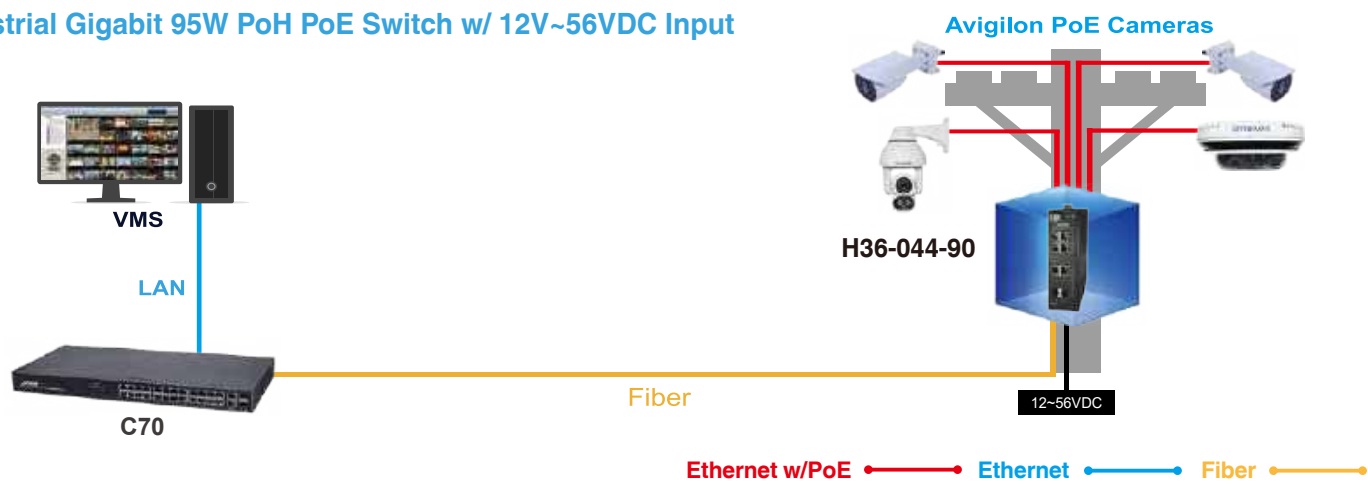

Outdoor Gigabit 95W PoH PoE Switch

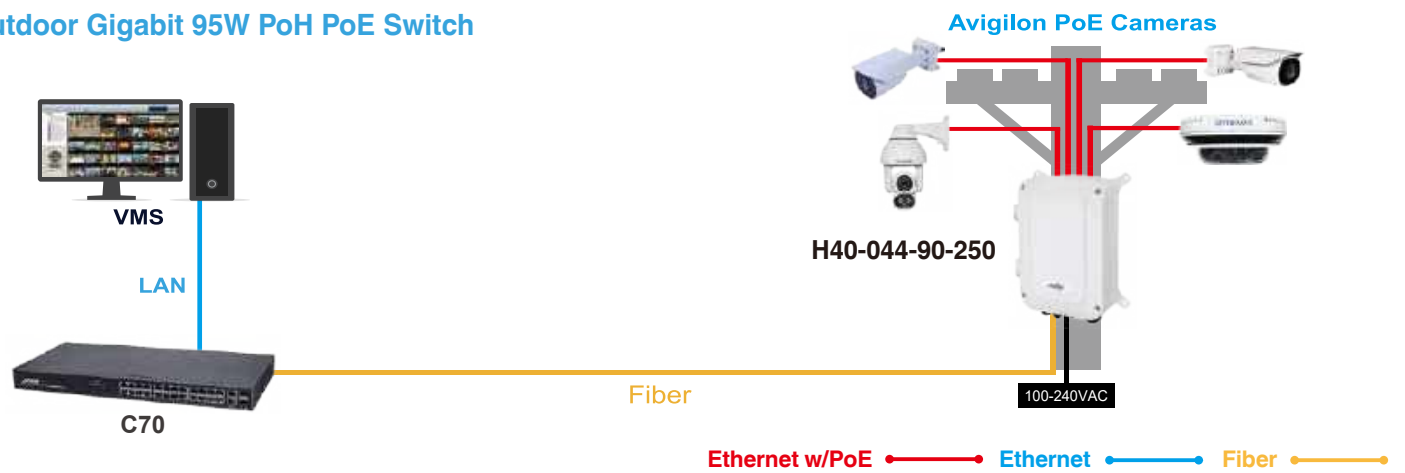

Double "A" for IP Surveillance

AETEK EPoC Products work with Avigilon PoE IP Cameras

Why Needs AETEK EPoC to Work with Avigilon Camera ?


- ✓ Migrates analog CCTV to Avigilon IP Surveillance using existing coaxial cables
- ✓ Extends Ethernet beyond 100m(328ft) limitation
- ✓ Back-up Ethernet transmission by ring topology




In order to acquire accurate data after testing AETEK IP surveillance peripherals with Avigilon PoE IP cameras, we use the latest Avigilon H4 PTZ / H4 IR PTZ / H5A PTZ speed dome to do field test.

The illustrations based on following diagram measured by renowned networking gears like Smartbits.

Field test

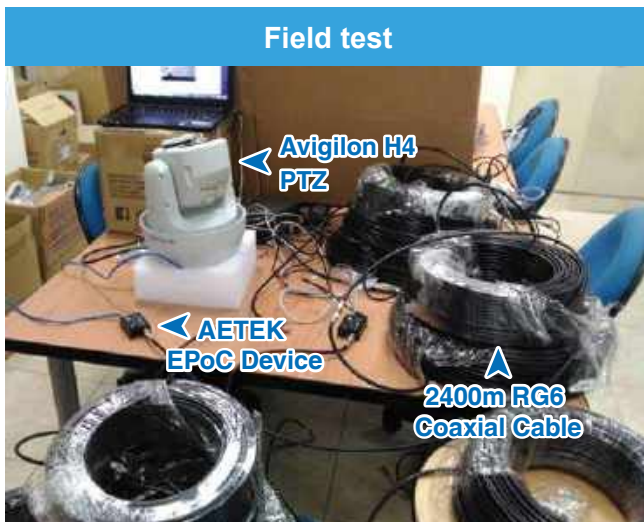

Testing Gears - SmartBits

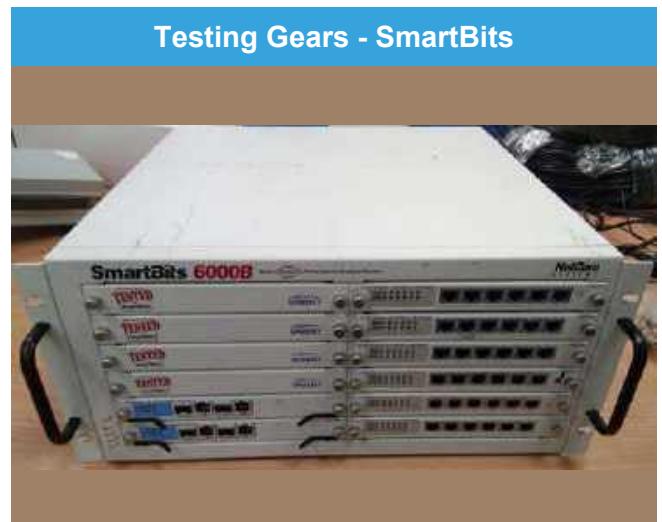

Long Range PoE & Ethernet Product Guide

Avigilon PoE IP Cameras

 Avigilon H4 Box camera • 1.0C-H4A-B3 • 3.0C-H4A-B2 • 2.0C-H4A-B1 • 3.0C-H4A-B3 • 2.0C-H4A-B2 • 5.0L-H4A-B2 • 2.0C-H4A-B3 • 5.0L-H4A-B3 • 3.0C-H4A-B1 • 8.0-H4A-B2	 Avigilon H5A Box Camera • 2.0C-H5A-B1 • 2.0C-H5A-B2 • 4.0C-H5A-B2 • 4.0C-H5A-B3 • 6.0C-H5A-B2 • 8.0C-H5A-B2	 Avigilon Outdoor Bullet Camera • 3.0-H4A-BO1-IR
 Avigilon H4 PRO Box camera • 8L-H4 PRO-B - 4K (8 MP)	 Avigilon H4 Fisheye • 6.0L-H4F-DO1-IR • 12.0-H4F-DO1-IR	 Avigilon Outdoor Bullet Camera • 2.0C-H5A-BO1-IR • 5.0C-H5A-BO2-IR • 2.0C-H5A-BO2-IR • 6.0C-H5A-BO1-IR • 4.0C-H5A-BO1-IR • 8.0C-H5A-BO1-IR 8.0 • 4.0C-H5A-BO2-IR
 Avigilon H4 PTZ • 2.0C-H4PTZ-DC30	 Avigilon H5A PTZ • 2.0C-H5A-PTZ-DP36 • 4.0C-H5A-PTZ-DC36 • 2.0C-H5A-PTZ-DC36 • 8.0C-H5A-PTZ-DP36 • 4.0C-H5A-PTZ-DP36 • 8.0C-H5A-PTZ-DC36	
 Avigilon H4 IR PTZ • 1.0C-H4IRPTZ-DP45 • 2.0C-H4IRPTZ-DP30 • 1.0C-H4IRPTZ-DP45-WP • 2.0C-H4IRPTZ-DP30-WP		

AETEK EPoC Product Line

EPoC Managed RX Switch	
 XC51-084-380 • Web UI Control • 8xBNC coaxial ports, 2xGbE RJ45 & 2xGbE SFP LAN ports • 370W power budget for 8 EPoC ports • 6KV surge protection for each EPoC port	 XC51-164-750 • Web UI Control • 16xBNC coaxial ports, 2xGbE RJ45 & 2xGbE SFP LAN ports • 740W power budget for 16 EPoC ports • 6KV surge protection for each EPoC port

EPoC RX Switch		
 XC10-041-250 • 4xBNC coax ports & 1xGigabit LAN port • Playing RX mode • 6KV surge protection for EPoC port • 250W Power Supply, 100~240VAC input	 XC10-084-380 • 8xBNC coax ports & 4xGigabit LAN ports • Playing RX mode • 6KV surge protection for EPoC port • 380W Power Supply, 100~240VAC input	 XC10-164-750 • 16xBNC coax ports & 4xGigabit LAN ports • Playing RX mode • 6KV surge protection for EPoC port • 750W Power Supply, 100~240VAC input

EPoC RX Adapter Series	
 XE10-110-RX • XE10-110-RX EPoC adapter (RX) • 65W@56VDC power adapter	 XE11-110-RX • XE11-110-RX PoE EPoC adapter (RX) • Supports 30W/60W/95W PoE Input


EPoC TX Series		EPoX IPTX Sries
 XE10-110-TX • 1-to-1 EPoC adapter (TX)	 XE12-120-TX • 1-to-2 EPoC adapter (TX)	 XE52-120-TX • 1- BNC coax port & two PoE LAN ports
 XE22-120-TX • 1-to-2, Outdoor EPoC adapter (TX) with IP67/IK10/6KV Surge protection	 XE22-110-TX • 1-to-1, Outdoor EPoC adapter (TX) with IP67/IK10/6KV Surge protection	 XE62-120-TX • Outdoor IP67, IK10, -30°C ~ 60°C • Built-in 6KV EPoC surge protection

EPoC TX Camera Housing Series				
 A5000-E • EPoC Camera Housing	 A5020-E • EPoC Camera Housing with IR illuminator (MAX: 50m)	 M2000 Series • AI Camera Housing – AC24V input	 M6000 Series • AI Camera Housing – PoE input (90W bt & 95W PoH)	

Test Diagram


EPoC (Ethernet & Power over Coax)

A: ● 1 - to - 1




PoE (Data + Power) ——— PoE Budget : 9.7W@1,200m / 3,937ft over RG6
Coax (Data + Power) ——— Data Rate : 100Mbps

B: ● 1 - to - Multi




PoE (Data + Power) ——— PoE Budget : 25W@500m / 1,640ft over RG6
Coax (Data + Power) ——— Data Rate : 100Mbps

C: ● Daisy - Chain

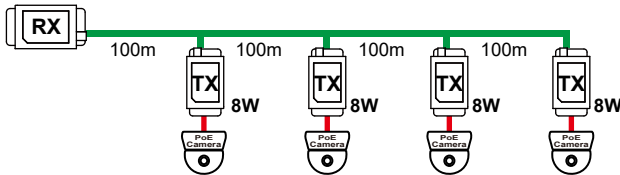

PoE (Data + Power) ——— PoE Budget : 8W@400m / 1,312ft over RG6
Coax (Data + Power) ——— Data Rate : 100Mbps

D: ● Ring (Failover)

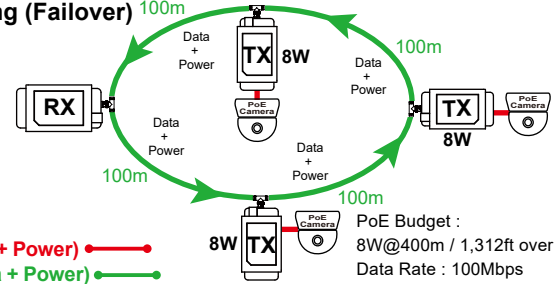

PoE (Data + Power) ——— PoE Budget : 8W@400m / 1,312ft over RG6
Coax (Data + Power) ——— Data Rate : 100Mbps


EoC (Ethernet over Coax)

E: ● 1 - to - 1




Power ——— Range : 2,400m / 7,874ft over RG6
Coax (Data) ——— Data Rate : 100Mbps
PoE (Data + Power) ———

F: ● 1 - to - Multi




Power ——— Range : 2,400m / 7,874ft over RG6
Coax (Data) ——— Data Rate : 100Mbps
PoE (Data + Power) ———

G: ● Daisy - Chain

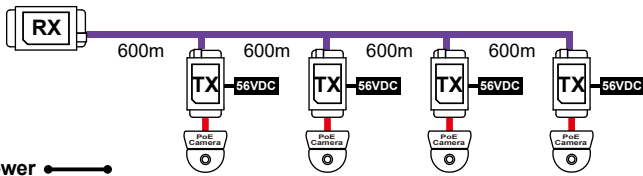

Power ——— Range : 2,400m / 7,874ft over RG6
Coax (Data) ——— Data Rate : 100Mbps
PoE (Data + Power) ———

H: ● Ring (Failover)

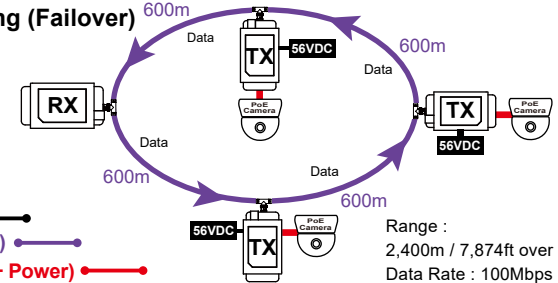

Power ——— Range : 2,400m / 7,874ft over RG6
Coax (Data) ——— Data Rate : 100Mbps
PoE (Data + Power) ———

EPoC Test Diagram

EPoC 1 - to - 1 Test



EPoC 1 - to - Multi Test



EPoC Daisy-Chain Test



EPoC Ring(Failover) Test



EPoC Camera Housing 1 - to - 1 Test



EoC Ring(Failover) Test



Avigilon H4 Box camera Test

ID	Topology		Power Consumption	Distance	Data Rate	Test results
 • 1.0C-H4A-B3 • 2.0C-H4A-B1 • 2.0C-H4A-B2 • 2.0C-H4A-B3 • 3.0C-H4A-B1 • 3.0C-H4A-B2 • 3.0C-H4A-B3 • 5.0L-H4A-B2 • 5.0L-H4A-B3 • 8.0-H4A-B2	EPoC 1-to-1	A: 	8W	1,200m	100Mbps	Pass
	EPoC 1-to-Multi	B: 	8W	1,200m	100Mbps	Pass
	EPoC Daisy-Chain	C: 	8W	1,200m	100Mbps	Pass
	EPoC Ring(Failover)	D: 	8W	1,200m	100Mbps	Pass
	EoC 1-to-1	E: 	8W	2,400m	100Mbps	Pass
	EoC 1-to-Multi	F: 	8W	2,400m	100Mbps	Pass
	EoC Daisy-Chain	G: 	8W	2,400m	100Mbps	Pass
	EoC Ring(Failover)	H: 	8W	2,400m	100Mbps	Pass
 A5020-E EPoC Camera Housing	EPoC 1-to-1	A: 	25W	500m	100Mbps	Pass

Avigilon H5A Box Camera Test

ID	Topology		Power Consumption	Distance	Data Rate	Test results
 Box Camera (H5A-B) • 2.0C-H5A-B1 • 4.0C-H5A-B2 • 6.0C-H5A-B2 • 2.0C-H5A-B2 • 4.0C-H5A-B3 • 8.0C-H5A-B2	EPoC 1-to-1	A: 	8W	1,200m	100Mbps	Pass
	EPoC 1-to-Multi	B: 	8W	1,200m	100Mbps	Pass
	EPoC Daisy-Chain	C: 	8W	1,200m	100Mbps	Pass
	EPoC Ring(Failover)	D: 	8W	1,200m	100Mbps	Pass
	EoC 1-to-1	E: 	8W	2,400m	100Mbps	Pass
	EoC 1-to-Multi	F: 	8W	2,400m	100Mbps	Pass
	EoC Daisy-Chain	G: 	8W	2,400m	100Mbps	Pass
	EoC Ring(Failover)	H: 	8W	2,400m	100Mbps	Pass
 A5020-E EPoC Camera Housing	EPoC 1-to-1	A: 	25W	500m	100Mbps	Pass

Avigilon Outdoor H4 Bullet Camera Test

ID	Topology		Power Consumption	Distance	Data Rate	Test results
 3.0-H4A-BO1-IR: H4 HD Bullet 3MP PoE IP camera	EPoC 1-to-1	A: 	13W	800m	100Mbps	Pass
	EPoC 1-to-Multi	B: 	13W	500m	100Mbps	Pass
	EPoC Daisy-Chain	C: 	13W	500m	100Mbps	Pass
	EoC 1-to-1	E: 	13W	2,400m	100Mbps	Pass
	EoC 1-to-Multi	F: 	13W	2,400m	100Mbps	Pass
	EoC Daisy-Chain	G: 	13W	2,400m	100Mbps	Pass
	EoC Ring(Failover)	H: 	13W	2,400m	100Mbps	Pass

Avigilon Outdoor H5A Bullet Camera Test

ID	Topology		Power Consumption	Distance	Data Rate	Test results
 Outdoor Bullet Camera (H5A-BO-IR) • 2.0C-H5A-BO1-IR • 2.0C-H5A-BO2-IR • 4.0C-H5A-BO1-IR • 4.0C-H5A-BO2-IR • 5.0C-H5A-BO2-IR • 6.0C-H5A-BO1-IR • 8.0C-H5A-BO1-IR 8.0	EPoC 1-to-1	A: 	13W	800m	100Mbps	Pass
	EPoC 1-to-Multi	B: 	13W	500m	100Mbps	Pass
	EPoC Daisy-Chain	C: 	13W	500m	100Mbps	Pass
	EoC 1-to-1	E: 	13W	2,400m	100Mbps	Pass
	EoC 1-to-Multi	F: 	13W	2,400m	100Mbps	Pass
	EoC Daisy-Chain	G: 	13W	2,400m	100Mbps	Pass
	EoC Ring(Failover)	H: 	13W	2,400m	100Mbps	Pass

Avigilon H4 PRO Box camera Test

ID	Topology		Power Consumption	Distance	Data Rate	Test results
 8L-H4 PRO-B-4K with Canon 70-200mm	EPoC 1-to-1	A: ●	13W	800m	100Mbps	Pass
	EPoC 1-to-Multi	B: ●	13W	500m	100Mbps	Pass
	EPoC Daisy-Chain	C: ●	13W	600m	100Mbps	Pass
	EPoC Ring (Failover)	D: ●	13W	2,400m	100Mbps	Pass
	EoC 1-to-1	E: ●	13W	2,400m	100Mbps	Pass
	EoC 1-to-Multi	F: ●	13W	2,400m	100Mbps	Pass
	EoC Daisy-Chain	G: ●	13W	2,400m	100Mbps	Pass
	EoC Ring (Failover)	H: ●	13W	2,400m	100Mbps	Pass
 A5020-E EPoC Camera Housing	EPoC 1-to-1	A: ●	25W	500m	100Mbps	Pass

Avigilon H4 Fisheye Test

ID	Topology		Power Consumption	Distance	Data Rate	Test results
 • 6.0L-H4F-DO1-IR • 12.0L-H4F-DO1-IR	EPoC 1-to-1	A: ●	25.5W	500m	100Mbps	Pass
	EoC 1-to-1	E: ●	25.5W	2,400m	100Mbps	Pass
	EoC 1-to-Multi	F: ●	25.5W	2,400m	100Mbps	Pass
	EoC Daisy-Chain	G: ●	25.5W	2,400m	100Mbps	Pass
	EoC Ring (Failover)	H: ●	25.5W	2,400m	100Mbps	Pass

Avigilon H4 PTZ Test

ID	Topology		Distance	Data Rate	Test results
 • 2.0C-H4PTZ-DC30	EoC 1-to-1	E: ●	2,400m	100Mbps	Pass
	EoC 1-to-Multi	F: ●	2,400m	100Mbps	Pass
	EoC Daisy-Chain	G: ●	2,400m	100Mbps	Pass
	EoC Ring (Failover)	H: ●	2,400m	100Mbps	Pass

Avigilon H4 IR PTZ Test

ID	Topology		Distance	Data Rate	Test results
 • 1.0C-H4IRPTZ-DP45 • 2.0C-H4IRPTZ-DP30 • 1.0C-H4IRPTZ-DP45-WP • 2.0C-H4IRPTZ-DP30-WP	EoC 1-to-1	E: ●	2,400m	100Mbps	Pass
	EoC 1-to-Multi	F: ●	2,400m	100Mbps	Pass
	EoC Daisy-Chain	G: ●	2,400m	100Mbps	Pass
	EoC Ring (Failover)	H: ●	2,400m	100Mbps	Pass

Avigilon H5A PTZ Test


ID	Topology		Distance	Data Rate	Test results
 • 2.0C-H5A-PTZ-DP36 • 2.0C-H5A-PTZ-DC36 • 4.0C-H5A-PTZ-DP36 • 4.0C-H5A-PTZ-DC36 • 8.0C-H5A-PTZ-DP36 • 8.0C-H5A-PTZ-DC36	EoC 1-to-1	E: ●	2,400m	100Mbps	Pass
	EoC 1-to-Multi	F: ●	2,400m	100Mbps	Pass
	EoC Daisy-Chain	G: ●	2,400m	100Mbps	Pass
	EoC Ring (Failover)	H: ●	2,400m	100Mbps	Pass

PoE Surge Protectors


Guard

Avigilon PoE IP Camera & Industrial PoE Switch


Application

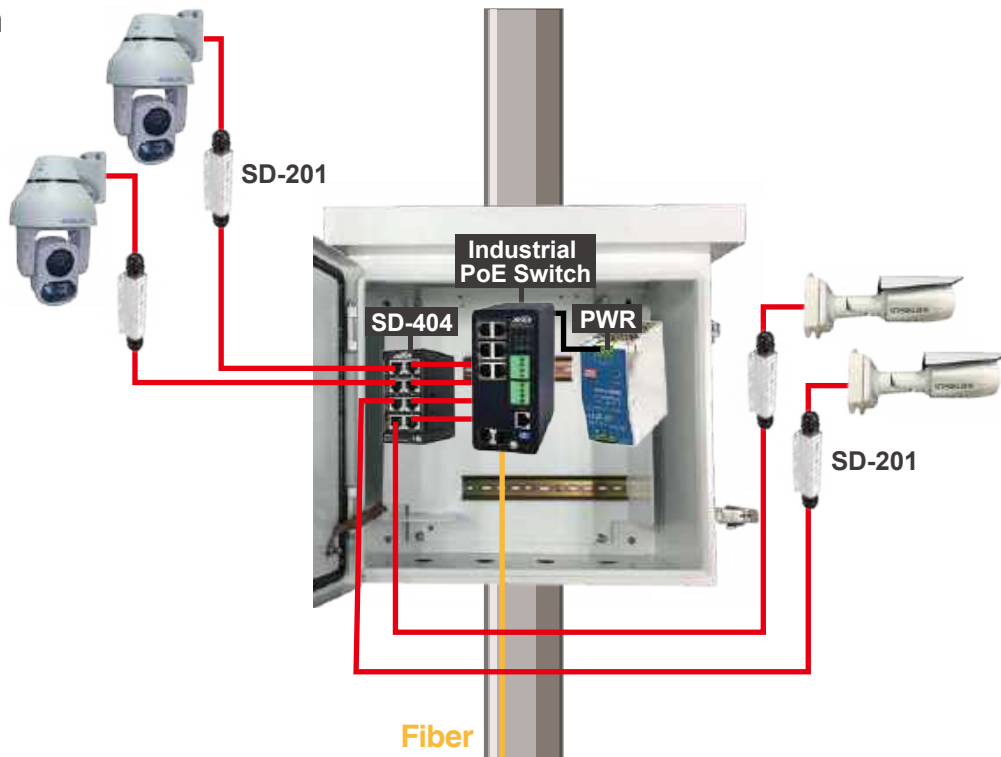

Avigilon PoE IP Camera & Industrial PoE Switch **without** PoE Surge Protectors

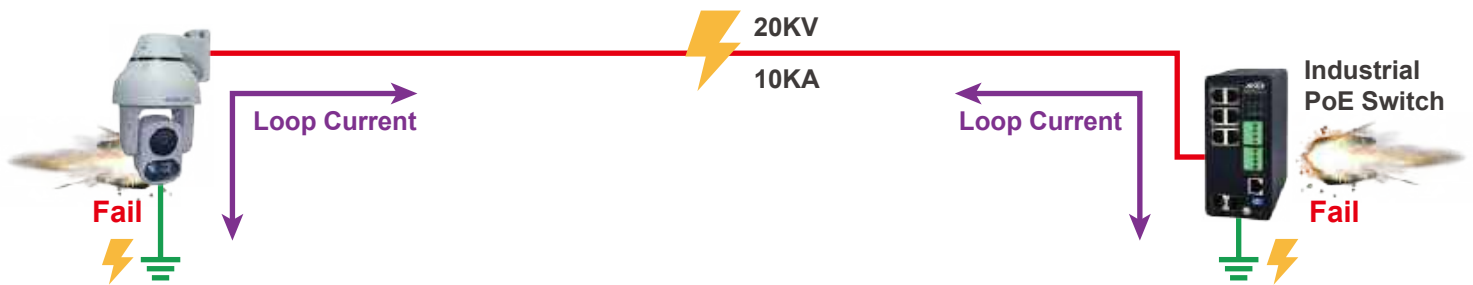

Avigilon PoE IP Camera & Industrial PoE Switch **with** PoE Surge Protectors

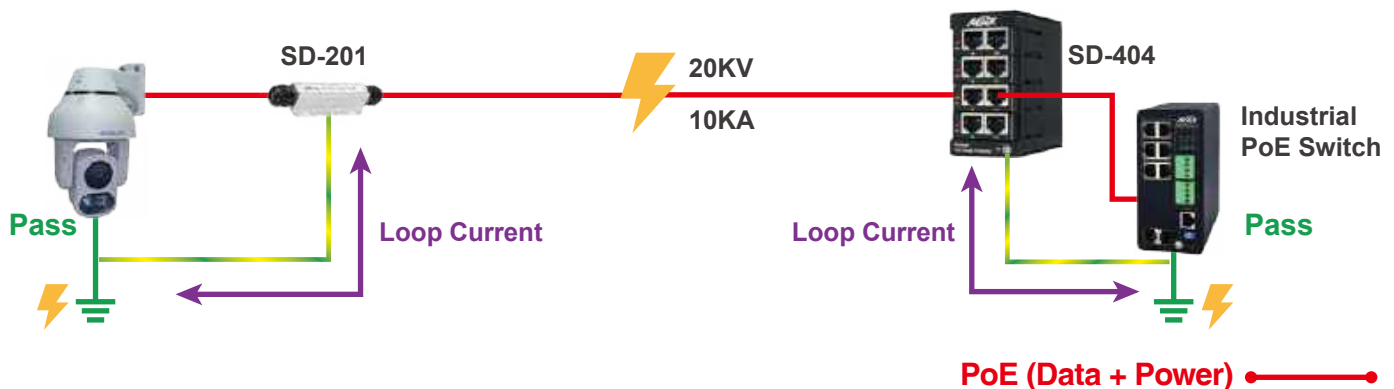

Double "A" for IP Surveillance



AETEK ONVIF PoE Switches work with Avigilon PoE IP Cameras

Avigilon Camera Controller

- Automatic discovery for Avigilon PoE IP camera
- Generate camera topology automatically
- Graphic grouping VLAN
- Cable diagnostic & reboot camera remotely
- PoE management
- Topology view/Floor view/Google map view
- Monitor/Configure/Manage Avigilon PoE IP camera remotely



The ONVIF PoE Switch series from AETEK offers a broad range of Layer 2 PoE Switches, equipped with multi-port Gigabit PoE (10M/100M/1G) and SFP transceiver (100M/1G) slots for flexible link complying with 30W PoE or 60W PoE power budget for any application.


Field test



Testing Gears - SmartBits




Topology View

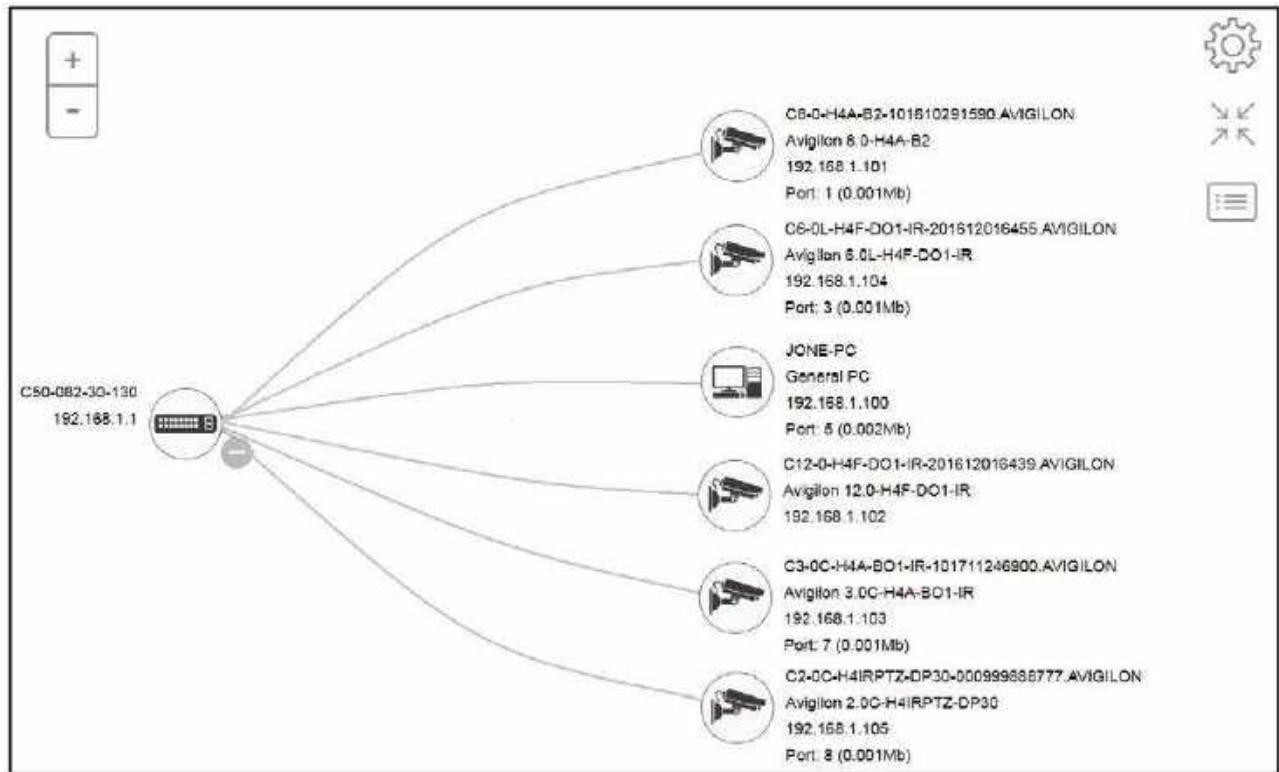

Floor Map View



Google Map View

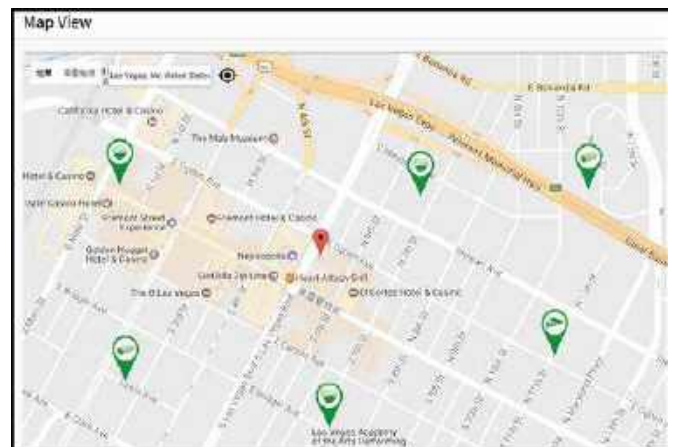


Device List

Remove	Status	Device Type	Model Name	Device Name	MAC	IP Address
☐	Online	IP Camera	Avigilon 8.0-H4A-B2	C8-0-H4A-B2-101610291590.AVIGILON	00-18-85-14-C6-B6	192.168.1.101
☐	Online	IP Camera	Avigilon 3.0C-H4A-BO1-IR	C3-0C-H4A-BO1-IR-101711246900.AVIGILON	00-18-85-1C-55-84	192.168.1.103
☐	Online	IP Camera	Avigilon 2.0C-H4IRPTZ-DP30	C2-0C-H4IRPTZ-DP30-000999888777.AVIGILON	00-1F-92-00-F4-16	192.168.1.105
☐	Online	IP Camera	Avigilon 12.0-H4F-DO1-IR	C12-0-H4F-DO1-IR-201612016439.AVIGILON	00-1F-92-01-C6-D7	192.168.1.102
☐	Online	IP Camera	Avigilon 6.0L-H4F-DO1-IR	C6-0L-H4F-DO1-IR-201612016455.AVIGILON	00-1F-92-01-C6-E7	192.168.1.104
☐	Online	PC	General PC	JONE-PC	94-DE-80-AC-23-11	192.168.1.100
☐	Online	SWITCH	C50-082-30-130	C50-082-30-130	68-8D-B6-00-02-76	192.168.1.1

Camera Dashboard

C8-0-H4A-B2-101610291590...	
Device Type	IP Camera
Device Name	C8-0-H4A-B2-101610291590.AVI
Model Name	Avigilon 8,0-H4A-B2
Mac Address	00-16-85-14-c8-b8
IP Address	192.168.1.101
Http Port	80
PoE Used	7.4 W
Login Diagnostics PoE Reboot	
Dashboard Notification Monitor	

Diagnostics

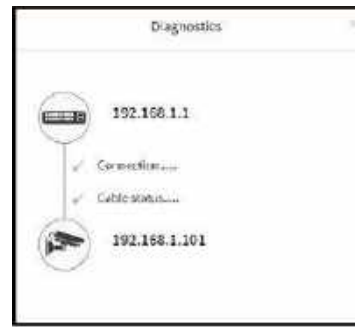

PoE Reboot



Reboot Camera



Industrial L2+ Gigabit Ethernet PoE Switch



H70-044-30

Features

- 4-port Gigabit 30W PoE + 2-port Gigabit RJ45 + 2-port Gigabit SFP
- L2+, ONVIF Controller
- 6KV PoE surge protection
- IEEE802.3at compliant
- Din-Rail design
- -40°C ~ 75°C operating temperature



H70-044-60

Features

- 4-port Gigabit 60W PoE + 2-port Gigabit RJ45 + 2-port Gigabit SFP
- L2+, ONVIF Controller
- 6KV PoE surge protection
- IEEE802.3at compliant
- Din-Rail design
- -40°C ~ 75°C operating temperature



H70-084-30

Features

- 8-port Gigabit 30W PoE + 4-port Gigabit SFP
- L2+, ONVIF Controller
- 6KV PoE surge protection
- IEEE802.3at compliant
- Din-Rail design
- -40°C ~ 75°C operating temperature

Outdoor L2+ Gigabit Ethernet ONVIF PoE Switch



H80-044-30-150

Features

- 4-port Gigabit 30W PoE + 2-port Gigabit RJ45 + 2-port Gigabit SFP
- L2+, ONVIF Controller
- 6KV PoE surge protection
- 40KV AC power surge protection
- Outdoor IP67 rated, IK10 vandal proof



H80-044-60-250

Features

- 4-port Gigabit 60W PoE + 2-port Gigabit RJ45 + 2-port Gigabit SFP
- L2+, ONVIF Controller
- 6KV PoE surge protection
- 40KV AC power surge protection
- Outdoor IP67 rated, IK10 vandal proof



H80-084-30-250

Features

- 8-port Gigabit 30W PoE + 4-port Gigabit SFP
- L2+, ONVIF Controller
- 6KV PoE surge protection
- 40KV AC power surge protection
- Outdoor IP67 rated, IK10 vandal proof

L2 Gigabit Ethernet ONVIF PoE Switch



C50-082-30-130

Features

- 8-port Gigabit 30W PoE + 2-port Gigabit SFP
- L2, ONVIF Controller
- 6KV PoE surge protection
- IEEE802.3at compliant



C50-162-30-250

Features

- 16-port Gigabit 30W PoE + 2-port Gigabit SFP
- L2, ONVIF Controller
- 6KV PoE surge protection
- IEEE802.3at compliant



C50-242-30-370

Features

- 24-port Gigabit 30W PoE + 2-port Gigabit SFP
- L2, ONVIF Controller
- 6KV PoE surge protection
- IEEE802.3at compliant

L2+ Gigabit Ethernet ONVIF Switch



C70-00B-01

Features

- 12-port Gigabit SFP + 2-port Gigabit RJ45 + 2-port 1G/10G SFP+
- L2+, ONVIF Controller
- IEEE 802.3az EEE standard for green power



C70-00E-01

Features

- 24-port Gigabit + 2-port Gigabit Combo (RJ45/SFP)
- L2, ONVIF Controller
- IEEE 802.3az EEE standard for green power





C70-00F-01

Features

- 20-port Gigabit SFP + 4-port Gigabit Combo (RJ45/SFP) + 4-port 1G/10G SFP+
- L2, ONVIF Controller
- IEEE 802.3az EEE standard for green power
- Fast recover <20ms of R-ring

Applications

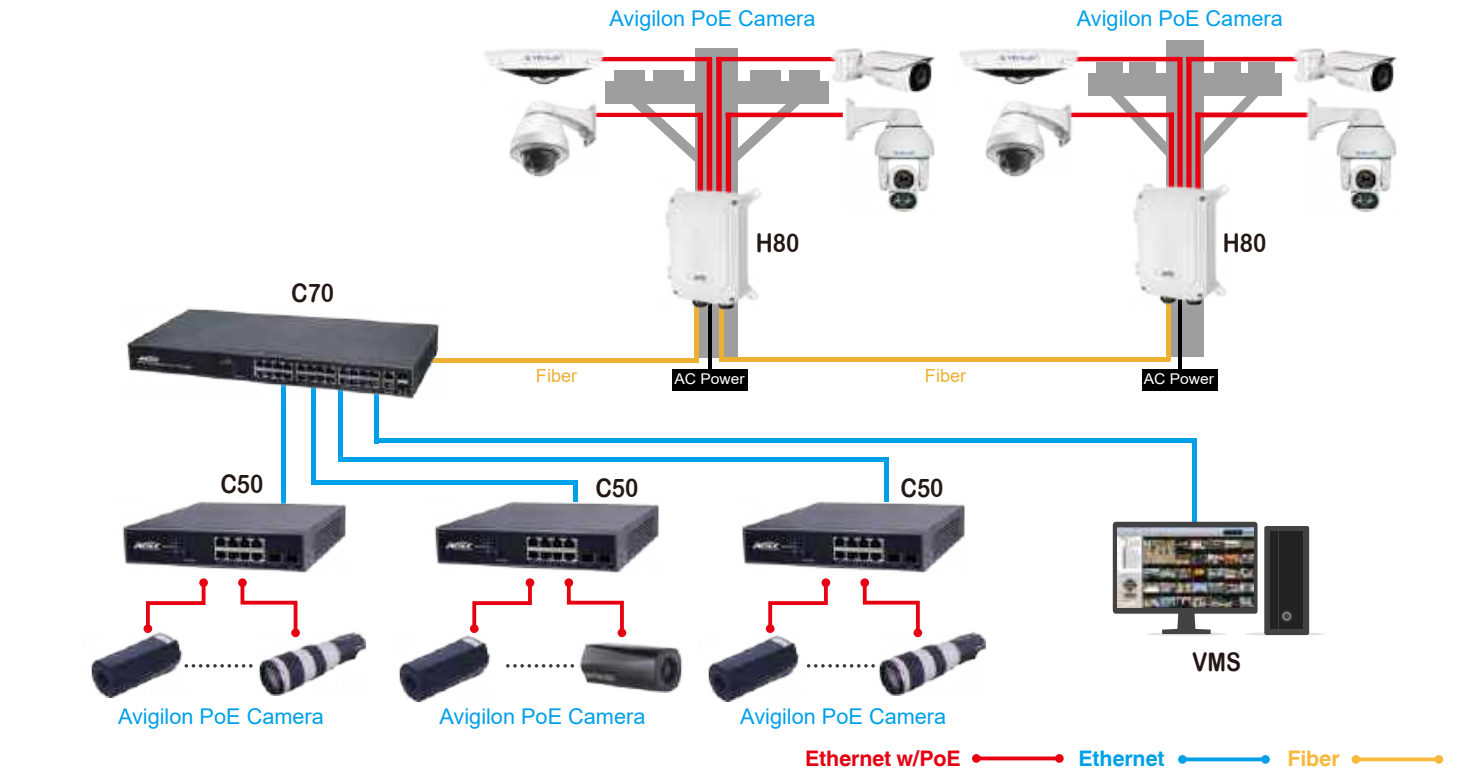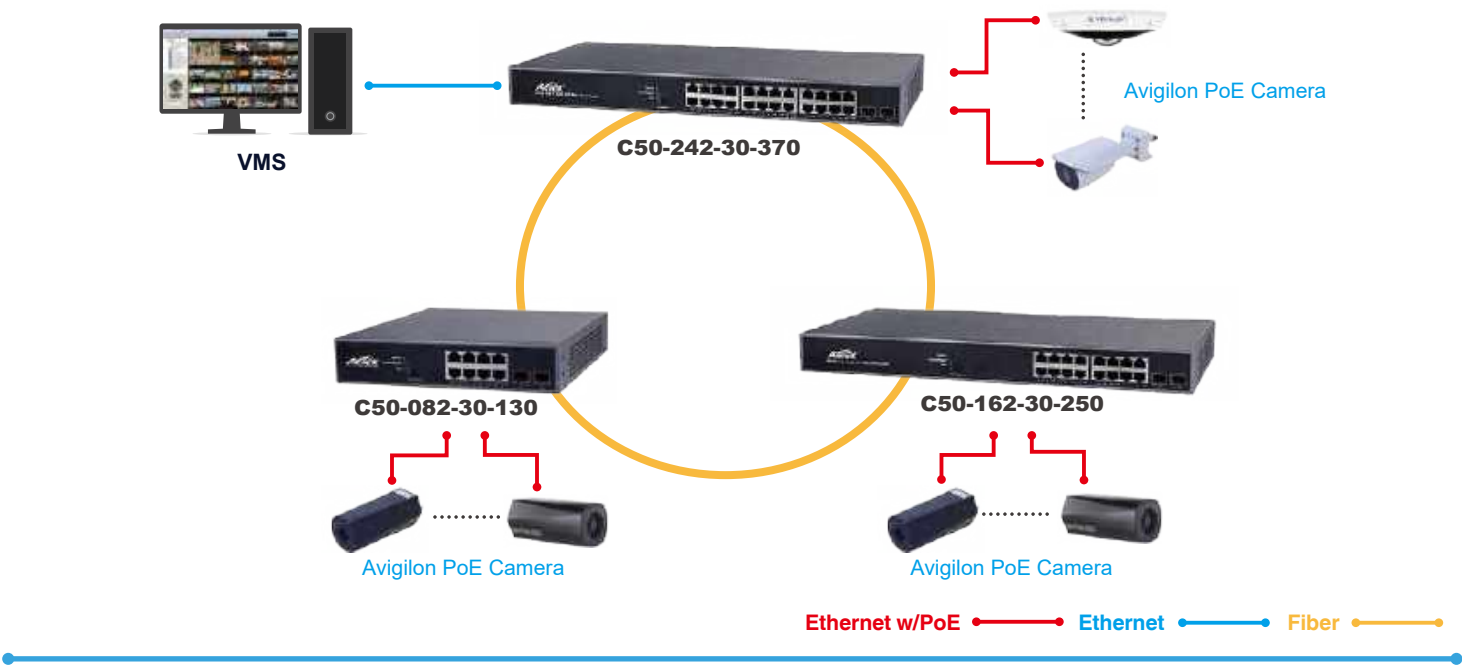

AI Camera Housing – PoE input

work with Avigilon H5A-B / H5 PRO Box Camera

Clear Image for Accurate Analysis

Features

- Spray water and active wiper to clean camera housing window over GUI
- Adjust IR beam angle suiting focal lens of H5A-B / H5 PRO Box camera over GUI
- Detect status of temperature, humidity, blower, and heater inside camera housing over GUI
- Avigilon H5A-B / H5 PRO box camera line intergrate with all-in-one AETEK's AI PoE camera housing including IK10 aluminum casting shell, IR illuminator, heater, and blower to perform accurate video analysis over single PoE Ethernet cable in any environment

Avigilon	H5A-B box camera	Avigilon	H5 PRO box camera
	2.0C-H5A-B1		8C-H5PRO-B
	2.0C-H5A-B2		16C-H5PRO-B
	4.0C-H5A-B2		26C-H5PRO-B
	4.0C-H5A-B3		40C-H5PRO-B
	6.0C-H5A-B2		61C-H5PRO-B
	8.0C-H5A-B2		

AI Camera Housing Wiper Operating



AI Camera Housing IR Operating



AI Camera Housing Video Link
<https://youtu.be/F2VhLnep1GA>



Rain



Clear



Dust



Clear




Darkness



Clear

Double "A" for IP Surveillance

AETEK Camera Housings work with Avigilon H4 HD / H4 PRO IP / H5A Box Cameras



AETEK Camera Housing for Avigilon Box Camera



Avigilon H4 HD Camera
AETEK Camera Housing



Avigilon H4 PRO Camera
w/ Canon 70-200mm Lens
w/ AETEK Camera Housing




Avigilon H5A Box Camera
AETEK Camera Housing

Box Camera (H5A-B)	
2.0C-H5A-B1	2.0C-H5A-B2
4.0C-H5A-B2	4.0C-H5A-B3
6.0C-H5A-B2	8.0C-H5A-B2

AETEEK Camera Housing



Dimensions

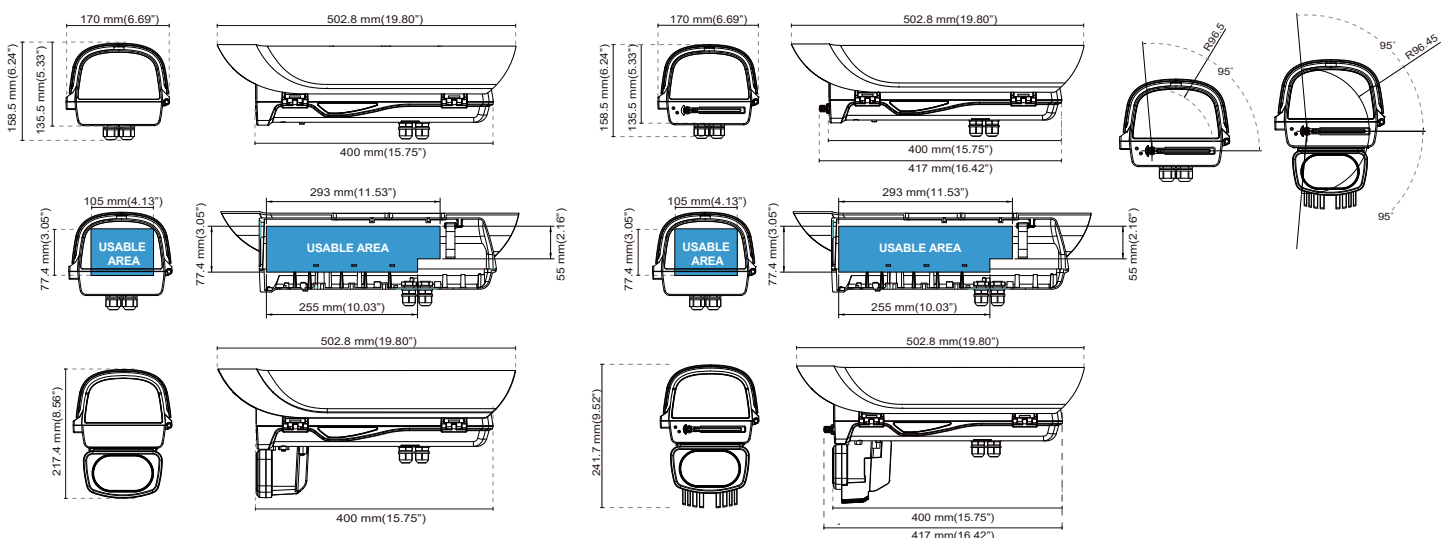

Unique Features on Professional Camera Housings


ITB(Illuminator Touch Board) for optional 12W/24W/48W **VAIR** illuminator

Without exposing power cable & RS485 wire for illuminator



Optional BK-101 wall mount bracket




Safety tether wire & Quick latch for safety installation

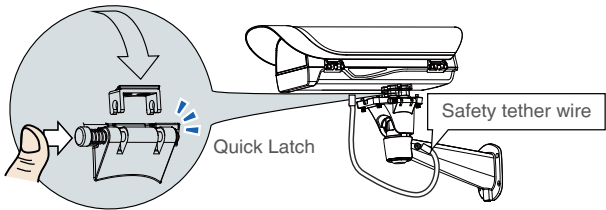




ITB for optional VAIR on Professional Models

VAIR Illuminator Technology

VAIR technology is an optical technology to adjust illuminator beam angle by remote control thru RS485 Pelco-D command or manual dip switch to suit camera FOV



VR-120	VR-241	VR-481
Snap-in 12W IR LEDs	Snap-in 24W IR LEDs	Snap-in 48W IR LEDs

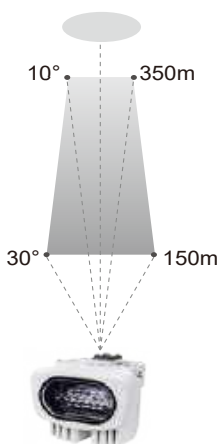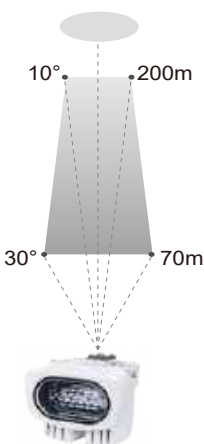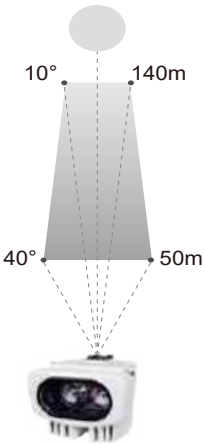

Optional Wiper & Water Tank



Video Clip Link

M2000 AI Camera Housing – AC24V input



M2000-I

Features

- IP68/IK10
- Window heater & blower
- Adjustable sunshield
- Optional VAIR illuminator
- AC24V input
- Aluminum die casting body



M2000-IW

Features

- IP66/IK10
- Window heater & blower
- Adjustable sunshield
- Optional VAIR illuminator
- Wiper
- AC24V input
- Aluminum die casting body



M2000-AI

Features

- IP68/IK10
- Window heater & blower
- Adjustable sunshield
- Optional VAIR illuminator
- Arctic cold start heater at -40°C (operating temperature -50°C)
- AC24V input
- Aluminum die casting body



M2000-AIW


Features

- IP66/IK10
- Window heater & blower
- Adjustable sunshield
- Optional VAIR illuminator
- Arctic cold start heater at -40°C (operating temperature -50°C)
- Wiper
- AC24V input
- Aluminum die casting body

AI Camera Housing Managed Web UI (M2000 Series)



Application

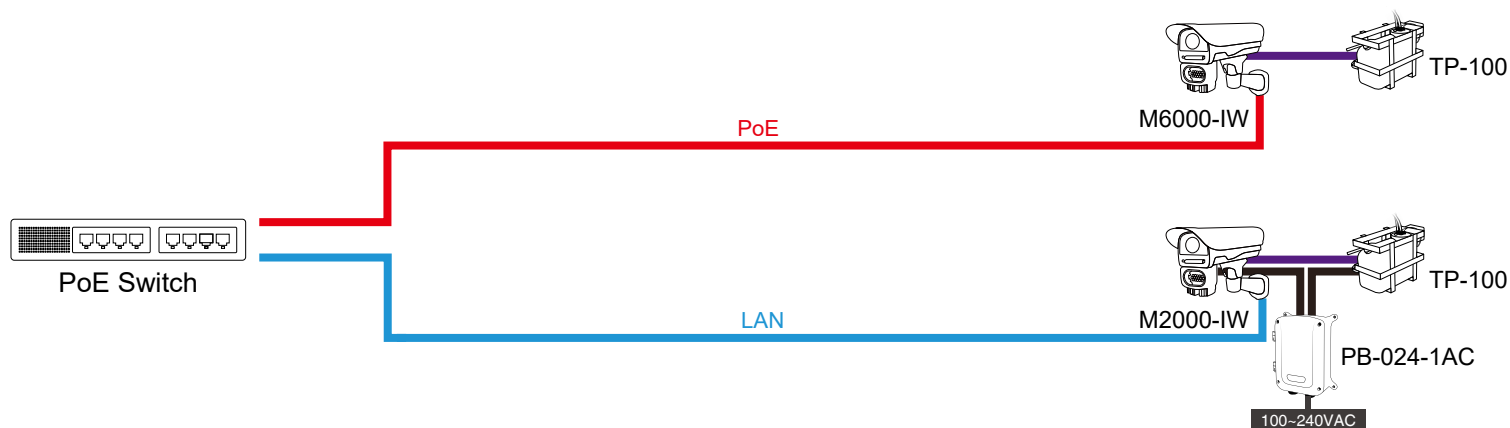

PoE (Data + Power) — Control Cable — Power — LAN —

M6000 AI Camera Housing – PoE input (90W bt & 95W PoH)



M6000-I

- Features**
- IP68 rated, IK10 vandal proof
 - Web UI Control
 - Window heater & blower
 - Adjustable sunshield
 - 90W bt & 95W PoH PoE input
 - Optional VAIR Illuminator
 - Aluminum die casting body



M6000-IW

- Features**
- Built-in wiper
 - IP66 rated, IK10 vandal proof
 - Web UI Control
 - Window heater & blower
 - Adjustable sunshield
 - 90W bt & 95W PoH PoE input
 - Optional VAIR Illuminator
 - Aluminum die casting body



M6000-AI

- Features**
- Arctic cold start heater at -40°C (operating temperature at -50°C)
 - IP68 rated, IK10 vandal proof
 - Web UI Control
 - Window heater & blower
 - Adjustable sunshield
 - 90W bt & 95W PoH PoE input
 - Aluminum die casting body




M6000-AIW

- Features**
- Arctic cold start heater at -40°C (operating temperature at -50°C)
 - Built-in wiper
 - IP66 rated, IK10 vandal proof
 - Web UI Control
 - Window heater & blower
 - Adjustable sunshield
 - 90W bt & 95W PoH PoE input
 - Aluminum die casting body

AI Camera Housing Managed UI



Plug-and-Play quick connection for PoE IP box/brick camera inside smart camera housing

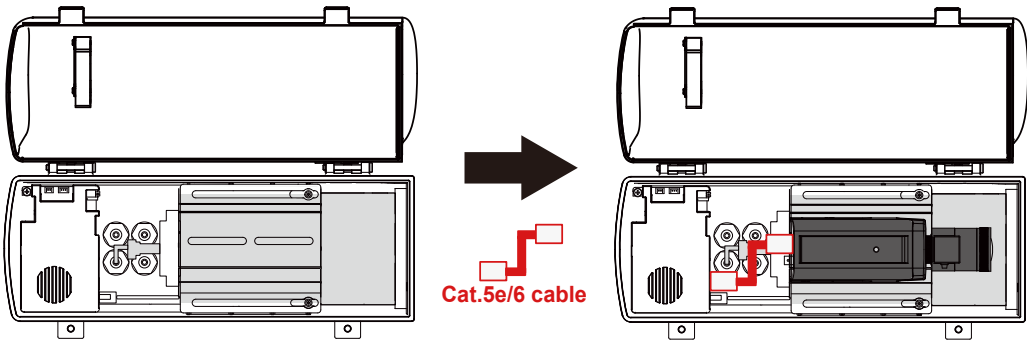

P20 Series - Professional AC24V Camera Housing

P2000-I



P2000-AI



P2000-IW



P2000-AIW



Matrix Table

	AC24V In	Window Heater	Camera Heater (-50 °C ~50 °C)	Adjustable Sunshield	Blower	ITB for 12/24W VAIR	ITB for 48W VAIR	Side-Opening Alarm	Wiper	IP66	IP68
P2000-I	v	v	-	v	v	v	v	v	-	-	v
P2000-AI	v	v	v	v	v	v	v	v	-	-	v
P2000-IW	v	v	-	v	v	v	v	v	v	v	-
P2000-AIW	v	v	v	v	v	v	v	v	v	v	-

P60 Series - Professional 90W PoE Camera Housing

P6000-I



P6000-IW



Matrix Table

	PoE 95W Input	Window Heater	Adjustable Sunshield	Blower	ITB for 12/24W VAIR	ITB for 48W VAIR	Side-Opening Alarm	Wiper	IP66	IP68
P6000-I	v	v	v	v	v	v	v	-	-	v
P6000-IW	v	v	v	v	v	v	v	v	v	-

A10 Series - Affordable Camera Housing

A50 Series - Affordable PoE Camera Housing

A1000



A1020



A5000



A5020



Matrix Table

	AC24V/DC24V In	PoE 30W In	Window Heater	Adjustable Sunshield	Blower	Built-in 6W Fixed IR	IP66	IP68
A1000	v	-	v	v	v	-	-	v
A1020	v	-	v	v	v	v(50m)	v	-
A5000	-	v	v	v	v	-	-	v
A5020	-	v	v	v	v	v(50m)	v	-



P29_P69 Series - ANPR Camera Housing

P2900-IW Kit A



P2900-AIW Kit A



P6900-IW Kit A



Matrix Table

	AC24V in	95W PoE in	Window Heater	Cold Start Heater (-50 °C ~50 °C)	Adjustable Sunshield	Blower	48W VAIR Illuminator	Side-Opening Alarm	Wiper	IP66
P2900-IW Kit A	v	-	v	-	v	v	v	v	v	v
P2900-AIW Kit A	v	-	v	v	v	v	v	v	v	v
P6900-IW Kit A	-	v	v	-	v	v	v	v	v	v

800m PoE Camera Housing over Coaxial Cable

A5000-E



A5020-E



A5100-E



Matrix Table

	EPoC In	MAX Distance	Output Power Budget	Germanium window	Window Heater	Adjustable Sunshield	Blower	Built-in 6W Fixed IR	6KV Surge Protection	IK10	IP66	IP68
A5000-E	v	600m(1,968ft)	20W	-	v	v	v	-	v	v	-	v
A5020-E	v	500m(1,640ft)	25W	-	v	v	v	50m (164ft)	v	v	v	-
A5100-E	v	800m(2,624ft)	15W	v	-	v	v	-	v	v	-	v

800m PoE Camera Housing over Cat.5e / Cat.6 Cable

A5000-T



A5020-T



A5100-T



Matrix Table

	EPoT In	MAX Distance	Output Power Budget	Germanium window	Window Heater	Adjustable Sunshield	Blower	Built-in 6W Fixed IR	6KV Surge Protection	IK10	IP66	IP68
A5000-T	v	600m(1,968ft)	20W	-	v	v	v	-	v	v	-	v
A5020-T	v	500m(1,640ft)	25W	-	v	v	v	50m (164ft)	v	v	v	-
A5100-T	v	800m(2,624ft)	15W	v	-	v	v	-	v	v	-	v



AISI 316L Stainless Steel AC24V Camera Housing

S1000



S2000-I



S2000-IW



Matrix Table

	AC24V In	Window Heater	Adjustable Sunshield	Blower	12W VAIR Illuminator	Wiper	IP66	IP68
S1000	v	v	v	v	-	-	-	v
S2000-I	v	v	v	v	v	-	-	v
S2000-IW	v	v	v	v	v	v	v	-

AISI 316L Stainless Steel PoE Camera Housing

S5000



S6000-I



S6000-IW



Matrix Table

	PoE 30W In	PoE 60W/95W In	Window Heater	Adjustable Sunshield	Blower	12W VAIR Illuminator	Wiper	IP66	IP68
S5000	v	-	v	v	v	-	-	-	v
S6000-I	-	v	v	v	v	v	-	-	v
S6000-IW	-	v	v	v	v	v	v	v	-

800m PoE over Coaxial Cable Camera Housing

S5000-E



S5000-EI



S5100-E



Matrix Table

	EPoT In	MAX Distance	Output Power Budget	Germanium window	Window Heater	Adjustable Sunshield	Blower	12W VAIR Illuminator	6KV Surge Protection	IK10	IP66	IP68
S5000-E	v	600m(1,968ft)	20W	-	v	v	v	v	v	v	-	v
S5000-EI	v	400m(1,312ft)	32W	-	v	v	v	v	v	v	v	-
S5100-E	v	800m(2,624ft)	15W	v	-	v	v	v	v	v	-	v

800m PoE over UTP/STP Cable Camera Housing

S5000-T



S5000-TI



S5100-T




Matrix Table



	EPoT In	MAX Distance	Output Power Budget	Germanium window	Window Heater	Adjustable Sunshield	Blower	12W VAIR Illuminator	6KV Surge Protection	IK10	IP66	IP68
S5000-T	v	600m(1,968ft)	20W	-	v	v	v	v	v	v	-	v
S5000-TI	v	400m(1,312ft)	32W	-	v	v	v	v	v	v	v	-
S5100-T	v	800m(2,624ft)	15W	v	-	v	v	v	v	v	-	v

VAIR Illuminator Technology


VAIR technology is an optical technology to adjust illuminator beam angle by remote control thru RS485 Pelco-D command or manual dip switch to suit camera FOV




Wide angle for short distance

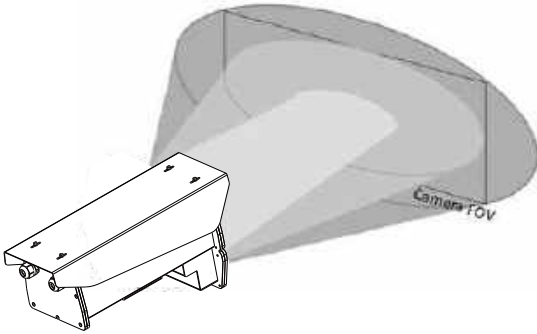

Tele angle for long distance

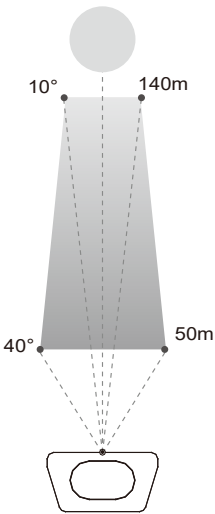

AISI 316L Stainless Steel Dimensions

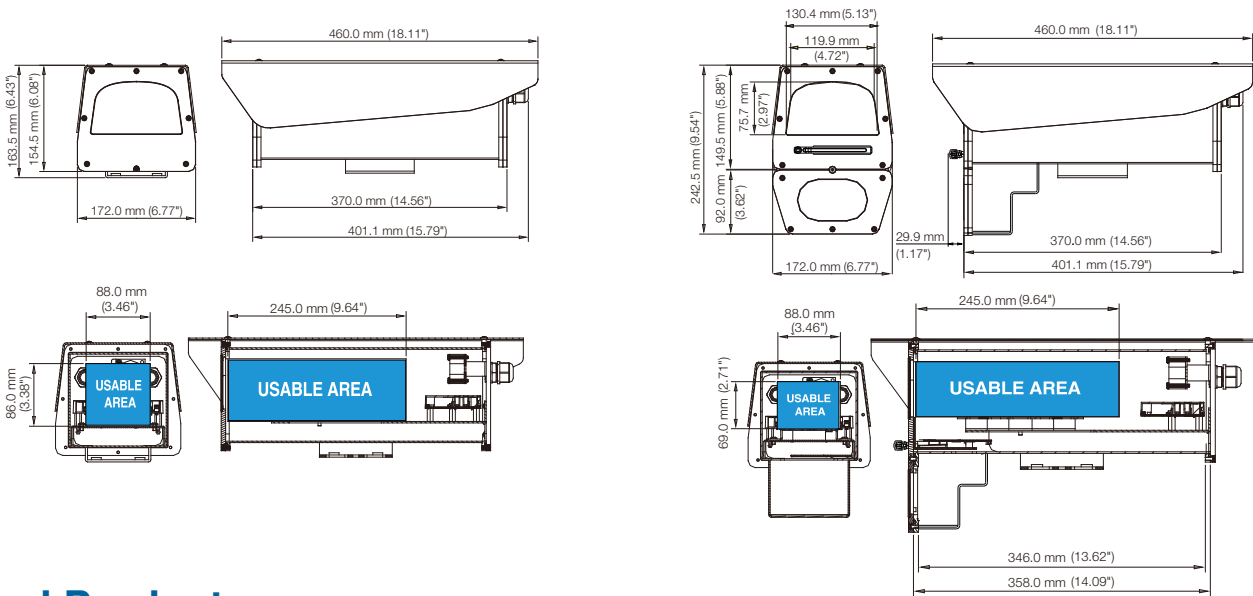

Related Product

Wall Mount Bracket



BK-103
AISI 316L Stainless Steel
Wall Mount Bracket

Water Tank & Pump (For -W model)



TP-100
Stainless Steel
10L Water Tank & Pump

Pole Mount



AT-102
AISI 316L Stainless steel
Pole Mount Adapter



AETEK INC.

3F, No.192, Lien-Cheng Rd., Chung-Ho, New Taipei City, 235, Taiwan, R.O.C.



sales@aetektec.com



www.aetektec.com