


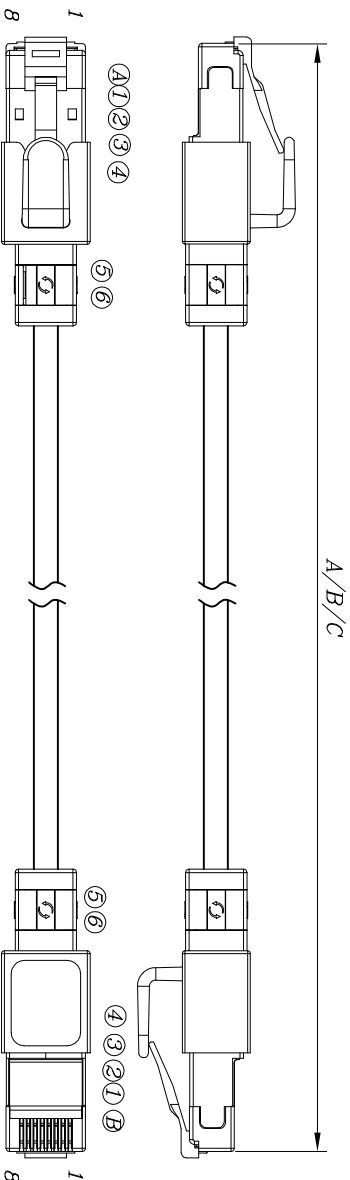

A/B/C

PLUG:


Drawing						
Mark						✓
GOLD PLATING	3Mu"	3u"	6u"	15u"	30u"	50u"
Mark						✓
TYPE	Shielded	Unshielded				
Mark	✓					
PC	UL 94-V0	UL 94-V2				
Mark		✓				

- Smoke Density: IEC61034-2
- Halogen Amount: IEC60754-2

Remarks:

- "A" indicate the length 1-9M, tolerance -0^{+80}
- "B" indicate the length 10-20M, tolerance -0^{+150}
- "C" indicate the length above 20M, tolerance $+(C*1\%)/-0$

ARRANGE METHOD:



ROHS



项次	品名	规格	颜色	用量	项次	品名	规格	颜色	用量	图号	
ITEM	DESCRIPTION	MATERIAL	COLOR	Q'TY	ITEM	DESCRIPTION	MATERIAL	COLOR	Q'TY	DWG NO.	
①	PLUG	C6R5ZC50V2SIL-3E(7493)	black	2	⑥	CLIP 2	PP	/	0.54g	P6ASSTB211-001	
②	Insert	10.7屏蔽加长型 V2	transparent	2	⑦	Cable Tie	"C"MM	white	2		
③	Cross Insert	3E屏蔽胶工字架 φ4.8	transparent	2	⑧						
④	PVC	60P:30P 1:1	/	8.344g	⑨						
⑤	CLIP 1	PP	/	0.94g	⑩						
CAT.6A SSTP 30AWG PATCH CORD											
线材规格		WIRE		CONNECTION		TABLE		裁线长度			
MATERIAL		white / orange	white / green	blue	white / blue	green	white / brown	brown	合计	模号	
CAT.6A SSTP PATCH CORD 30AWG		PVC	orange	green	blue	blue	green	brown	TOTAL	MOLD NO	
		LSOH	✓	A1	A2	A3	A4	A5	A6	A7	A8
				B1	B2	B3	B4	B5	B6	B7	B8
CABLE COLOR		red	orange	yellow	green	blue	purple	gray	white	black	
UNIT mm											
比例 SCALE 1/1											
张数 SHEET 1/1											
角法 PROJ. 											
更改 REV 1											
制图 DRAWN CathyLi											
审核 CHECKED 吴明											
批准 APPROVAL 沈红波											