


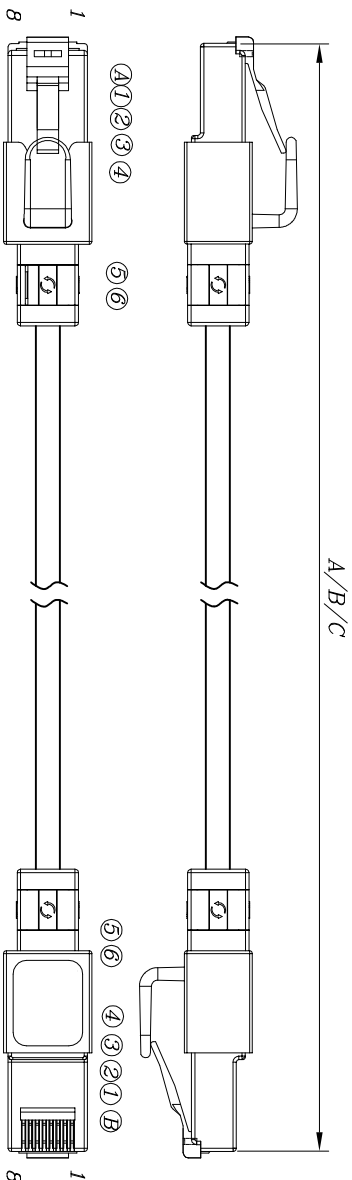

A/B/C

PLUG:


Drawing						
Mark						✓
GOLD PLATING	3Mu"	3u"	6u"	15u"	30u"	50u"
Mark						✓
TYPE	Shielded	Unshielded				
Mark		✓				
PC	UL 94-V0	UL 94-V2				
Mark		✓				

- Smoke Density: IEC61034-2
- Halogen Amount: IEC60754-2

Remarks:

- "A" indicate the length 1-9M, tolerance $-_{-0}^{+80}$
- "B" indicate the length 10-20M, tolerance $-_{-0}^{+150}$
- "C" indicate the length above 20M, tolerance $+(C*1\%)/-0$

ARRANGE METHOD:



ROHS



项次	品名	规格	颜色	用量	项次	品名	规格	颜色	用量	图号
ITEM	DESCRIPTION	MATERIAL	COLOR	Q'TY	ITEM	DESCRIPTION	MATERIAL	COLOR	Q'TY	DWG NO.
①	PLUG	C6F5ZC50V2L(2.15,7493)	black	2	⑥	CLIP 2	PP	/	0.54g	P60UTB211-001
②	Insert	10.7 V2	transparent	2	⑦	Cable Tie	"C"MM	white	2	名称
③	Insert	φ4.0 V2	transparent	2	⑧					TITLE
④	PVC	60P:30P 1:1	/	8.344g	⑨					CAT.6 UTP 28AWG PATCH CORD
⑤	CLIP1	PP	/	0.94g	⑩					
线材规格		WIRE		CONNECTION		TABLE		裁线长度		单位
MATERIAL		white/orange		white/green		white/brown		TOTAL		UNIT
CAT.6 UTP		PVC		white/blue		white/brown		MOLD NO		mm
PATCH CORD		LSOH		A1 A2 A3 A4 A5 A6 A7 A8		A1 A2 A3 A4 A5 A6 A7 A8		02-211		出图日期
28AWG		✓		B1 B2 B3 B4 B5 B6 B7 B8		B1 B2 B3 B4 B5 B6 B7 B8		02-212		DRAWN DATE
CABLE COLOR		red		orange yellow green blue purple gray white black		orange yellow green blue purple gray white black		02-241		2021/01/21
								审核		审批
								Carline		Wuming
								CHECKED		制图
								1/1		CathyLi
								SHEET		
								1/1		
								REV		
								1		