

MOMENT[®]

CONSUMER PRODUCT CATALOG


MOMENT
2023



+886-37-683880



operation@mm-smc.com



+886-37-683-660



351028苗栗縣頭份市東民路173號
No. 173, Dongmin Rd., Toufen City,
Miaoli County 351, Taiwan (R.O.C.)



官網連結

USB Flash Drives



MU34



SPECIFICATIONS

Interface	USB 3.2(USB 3.0, USB 2.0 compatible)
Storage Capacities	128GB, 256GB
Performance	R 120MB/s, W 60MB/s
System Compatibility	Windows 7/8.1/10/11 Linux kernel 2.4 and later version Mac OS X 10.8 and later version



MU50



SPECIFICATIONS

Interface	USB 3.2 (USB 2.0 compatible)
Storage Capacities	64GB, 128GB, 256GB
Performance	R 120MB/s, W30MB/s
System Compatibility	Windows 7/8.1/10/11 Linux kernel 2.4 and later version Mac OS X 10.8 and later version



MU37



SPECIFICATIONS

Interface	USB 3.2(USB 3.0, USB 2.0 compatible)
Storage Capacities	32GB, 64GB, 128GB, 256GB
Performance	R 90MB/s, W 20MB/s
System Compatibility	Windows 7/8.1/10/11 Linux kernel 2.4 and later version Mac OS X 10.8 and later version



MU37c



SPECIFICATIONS

Interface	USB 3.2 (USB 2.0 compatible)
Storage Capacities	32GB, 64GB, 128GB
Performance	R 70MB/s, W10MB/s
System Compatibility	Windows 7/8.1/10/11 Linux kernel 2.4 and later version Mac OS X 10.8 and later version



MU39



SPECIFICATIONS

Interface	USB 3.2(USB 3.0, USB 2.0 compatible)
Storage Capacities	32GB, 64GB, 128GB, 256GB, 512GB
Performance	R 90MB/s, W 20MB/s
System Compatibility	Windows 7/8.1/10/11 Linux kernel 2.4 and later version Mac OS X 10.8 and later version



MU22



SPECIFICATIONS

Interface	USB 2.0
Storage Capacities	16GB, 32GB
Performance	R 14MB/s, W 5MB/s
System Compatibility	Windows 7/8.1/10/11 Linux kernel 2.4 and later version Mac OS X 10.8 and later version

USB Flash Drives

Do you want to record
the GAME DATA ?

MK700






SPECIFICATIONS

Interface	USB 3.2
Storage Capacities	250GB,500GB, 1TB
Performance	R 1000MB/s, W 800MB/s
System Compatibility	Windows 7/8.1/10/11 Linux kernel 2.4 and later version Mac OS X 10.8 and later version



Flash Memory Card

Durability and Reliability

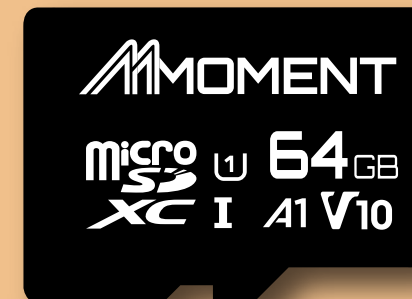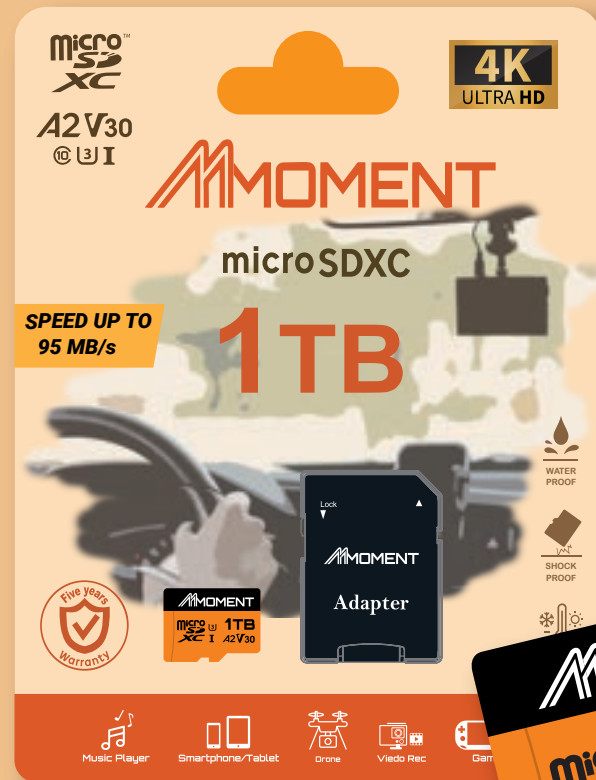

A1V10



SPECIFICATIONS

Interface	SD 3.0
Storage Capacities	32GB · 64GB
Performance	R 95MB/s, W 20MB/s
System Compatibility	Windows 7/8.1/10/11 Linux kernel 2.4 and later version Mac OS X 10.8 and later version

A2V30 **NEW**

SPECIFICATIONS

Interface	SD 3.0
Storage Capacities	128GB · 256GB · 512GB · 1TB
Performance	R 95MB/s, W 90MB/s
System Compatibility	Windows 7/8.1/10/11 Linux kernel 2.4 and later version Mac OS X 10.8 and later version



A1V30



SPECIFICATIONS

Interface	SD 3.0
Storage Capacities	64GB · 128GB · 256GB · 512GB
Performance	R 95MB/s, W 70 MB/s
System Compatibility	Windows 7/8.1/10/11 Linux kernel 2.4 and later version Mac OS X 10.8 and later version



Solid State Drive



MS11 -13



SPECIFICATIONS

Interface	SATA 6Gb/s
Storage Capacities	120GB, 240GB, 480GB
Performance	R 550MB/s, W 500MB/s
System Compatibility	Windows 7/8.1/10/11 Linux kernel 2.4 and later version Mac OS X 10.8 and later version

M.2 2280



SPECIFICATIONS

Interface	SATA 6Gb/s
Storage Capacities	120GB, 240GB, 256GB, 480GB, 512GB
Performance	R500MB/s, W450MB/s
System Compatibility	Windows 7/8.1/10/11 Linux kernel 2.4 and later version Mac OS X 10.8 and later version



MS16



SPECIFICATIONS


Interface	SATA 6Gb/s
Storage Capacities	128GB, 256GB, 512GB, 1TB
Performance	R 550MB/s, W 500MB/s
System Compatibility	Windows 7/8.1/10/11 Linux kernel 2.4 and later version Mac OS X 10.8 and later version

MT34



SPECIFICATIONS

Interface	PCIe Gen 3x4
Storage Capacities	256GB, 512GB, 1TB, 2TB
Performance	R2100MB/s, W1900MB/s
System Compatibility	Windows 7/ 8.1/10/11 Linux kernel 3.3 and later version

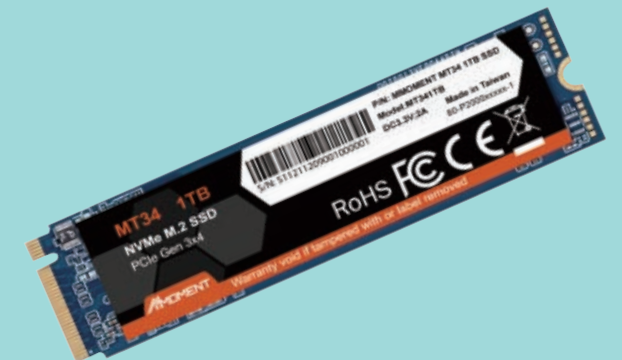

ME25-U32



SPECIFICATIONS

Interface	USB3.2 Gen1
HDD Support	1.5" SATA HDD (9.5mm Height) SSD (7mm Height)
System Compatibility	Windows 7/8.1/10/11 Linux kernel 2.4 and later version Mac OS X 10.8 and later version



MP34



SPECIFICATIONS

Interface	PCIe Gen 3x4
Storage Capacities	256GB, 512GB, 1TB, 2TB
Performance	R3500MB/s, W3000MB/s
System Compatibility	Windows 7/ 8.1/10/11 Linux kernel 3.3 and later version



DRAM Module



DDR4



SPECIFICATIONS

Interface	DDR4 3200MHz / 2666MHz /2400MHz
Storage Capacities	4GB, 8GB, 16GB, 32GB
Module spec	288-pin UDIMM (For desktop)
System Compatibility	Windows 7/8.1/10/11 Linux kernel 2.4 and later version Mac OS X 10.8 and later version

DDR4



SPECIFICATIONS

Interface	DDR4 3200MHz / 2666MHz /2400MHz
Storage Capacities	4GB, 8GB, 16GB, 32GB
Module spec	260-pin SODIMM (For notebook)
System Compatibility	Windows 7/8.1/10/11 Linux kernel 2.4 and later version Mac OS X 10.8 and later version



DDR3



SPECIFICATIONS

Interface	DDR3 1600MHz /1333MHz
Storage Capacities	4GB, 8GB
Module spec	240-pin UDIMM (For desktop)
System Compatibility	Windows 7/8.1/10/11 Linux kernel 2.4 and later version Mac OS X 10.8 and later version



DDR3



SPECIFICATIONS

Interface	DDR3 1600MHz /1333MHz
Storage Capacities	4GB, 8GB
Module spec	204-pin SODIMM (For notebook)
System Compatibility	Windows 7/8.1/10/11 Linux kernel 2.4 and later version Mac OS X 10.8 and later version



USB / MicroSD



DRAM



SSD



Unleash your imagination Fashions for young people

When you crave screaming performance and thrill-seeking speed, the LinkMore pushes you to the limit.



SSD



XE400



SPECIFICATIONS

Interface	PCIe Gen 4x4
Storage Capacities	250GB, 500GB, 1TB, 2TB
Form Factor	M.2 2280
System Compatibility	Windows@7/8/10/11 Linux kernel 3.3 and later version



XE200



SPECIFICATIONS

Interface	PCIe Gen 3x4
Storage Capacities	256GB, 512GB, 1TB
Form Factor	M.2 2280
System Compatibility	Windows@7/8/10/11 Linux kernel 3.3 and later version



XE400



SPECIFICATIONS

Interface	SATA 6Gb/s
Storage Capacities	120GB, 240GB, 480GB
Form Factor	2.5inch
System Compatibility	Windows@7/8/10/11 Linux kernel 3.3 and later version

DRAM

KF-Force UDIMM



SPECIFICATIONS

Interface	DDR4 3200MHz / 2666MHz
Storage Capacities	8GB
Module spec	288-pin UDIMM (For desktop)
System Compatibility	Windows@7/8/10/11 Linux kernel 2.4 and later version Mac OS X 10.8 and later version



KF-Force SODIMM



SPECIFICATIONS

Interface	DDR4 3200MHz / 2666MHz
Storage Capacities	8GB
Module spec	260-pin SODIMM (For notebook)
System Compatibility	Windows@7/8/10/11 Linux kernel 2.4 and later version Mac OS X 10.8 and later version



USB

NR770 PRO



SPECIFICATIONS

Interface	USB 3.2
Storage Capacities	256GB, 512GB, 1TB
Performance	R1000MB/s, W800MB/s
System Compatibility	Windows 7/8.1/10/11 Linux kernel 2.4 and later version Mac OS X 10.8 and later version



NR34



SPECIFICATIONS

Interface	USB 3.2
Storage Capacities	128GB, 256GB
Performance	R120MB/s, W60MB/s
System Compatibility	Windows 7/8.1/10/11 Linux kernel 2.4 and later version Mac OS X 10.8 and later version



Micro SD

XV13



SPECIFICATIONS

Interface	SD 3.0
Speed class	A1V30
Storage Capacities	64GB, 128GB, 256GB, 512GB
System Compatibility	Windows 7/8.1/10/11 Linux kernel 2.4 and later version Mac OS X 10.8 and later version



New product preview

XV23



SPECIFICATIONS

Interface	microSD 3.0
Speed class	A2V30
Storage Capacities	128GB, 256GB, 512GB, 1TB
System Compatibility	Windows 7/8.1/10/11 Linux kernel 2.4 and later version Mac OS X 10.8 and later version



EJECT 32




SPECIFICATIONS

Interface	USB 3.2
Storage Capacities	64GB, 128GB, 256GB
Performance	R100MB/s, W30MB/s
System Compatibility	Windows 7/8.1/10/11 Linux kernel 2.4 and later version Mac OS X 10.8 and later version


**DUST
PROOF**


**SHOCK
PROOF**


**TEMPERATURE
PROOF**



WARRANTY

